



## Huaptec Wilkinson Splitter


### Overview

These splitter allow from 2 to 4 inside antennas to be used with a single amplifier. Each inside antenna connection has  $\leq 0.5\text{dB}$  signal loss. These splitters can support 2G,3G and 4G from 698MH to 2700MHz.



### Key Features

- Full Band(698-2700MHz)
- 2, 3 or 4 ways splitters
- Easy to install
- Meets international standards

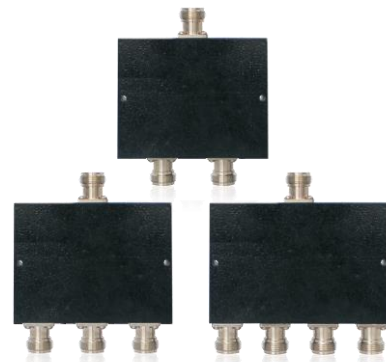

### Specification

Item	2 Way Splitter	3 Way Splitter	4 Way Splitter
Frequency Range		698~2700MHz	
Splitter Loss	3dB	4.8dB	6dB
Insertion Loss	$\leq 0.4\text{dB}$	$\leq 0.5\text{dB}$	$\leq 0.5\text{dB}$
Isolation		$\geq 20\text{dB}$	
Input Impedance		50 $\Omega$	
VSWR	$\leq 1.25$	$\leq 1.3$	$\leq 1.3$
Maximum Power		50W	
Connector Type		N-Female	